

SPECIFICATIONS UPDATE (Years 2025 and 2026)

Greg Sholar

Asphalt Materials Engineer

2025 FLORIDA ASPHALT
EXPO & CONFERENCE

NEXT MILE ✶ **NEXT LEVEL**



July 2025 - Section 334

- Visual inspection quantity changed from 2,000 to 4,000 tons.
- Added asphalt binder failures to the list of failures that can be delineated instead of requiring an EAR.



July 2025 - Section 337

- **20% RAP allowed in dense graded friction course mixtures with Florida limestone.**



July 2026 - Section 334

- MB 22-03 is adopted into standard specs. More RAP in structural PG 76-22 mixtures.

Table 334-3				
Allowable RAP Percentages ¹ in Type SP Structural Mixtures with PG 76-22 Asphalt Binder				
Gradation ² % Passing #16 Sieve		Coarse RAP ≤ 40%	Intermediate RAP > 40% to ≤ 50%	Fine RAP > 50%
PG _{HT} ³ > 100.0° C	Allowable RAP Percentage	≤ 40%	≤ 25%	≤ 25%
PG _{HT} ³ ≤ 100.0° C		≤ 45%	≤ 35%	
Notes:				
1. RAP aggregate by weight of total aggregate or RAP binder by weight of total binder.				
2. RAP gradations based on ignition oven extraction of RAP material in accordance with FM 5-563.				
3. PG _{HT} : asphalt binder high temperature continuous performance grade of RAP in accordance with Section 916.				



July 2026 - Section 334


- Can move core locations to 2 ft. offset when next to live traffic.
- 30-day requirement to submit delineation scope. (Same as for an EAR).
- Will allow SP-19.0 mix type below FC-5 and as final surface in shoulders.

~~————— Type SP-19.0 – Do not use for the final (top) structural layer below FC-5 mixtures. Type SP-19.0 mixtures are permissible for the layer directly below FC-9.5 and FC-12.5 mixtures. Do not use for the final (top) layer of shoulders.~~



July 2026 - Section 337

- Added FC-7 mix type. It is a finer OGFC for non-limited access.

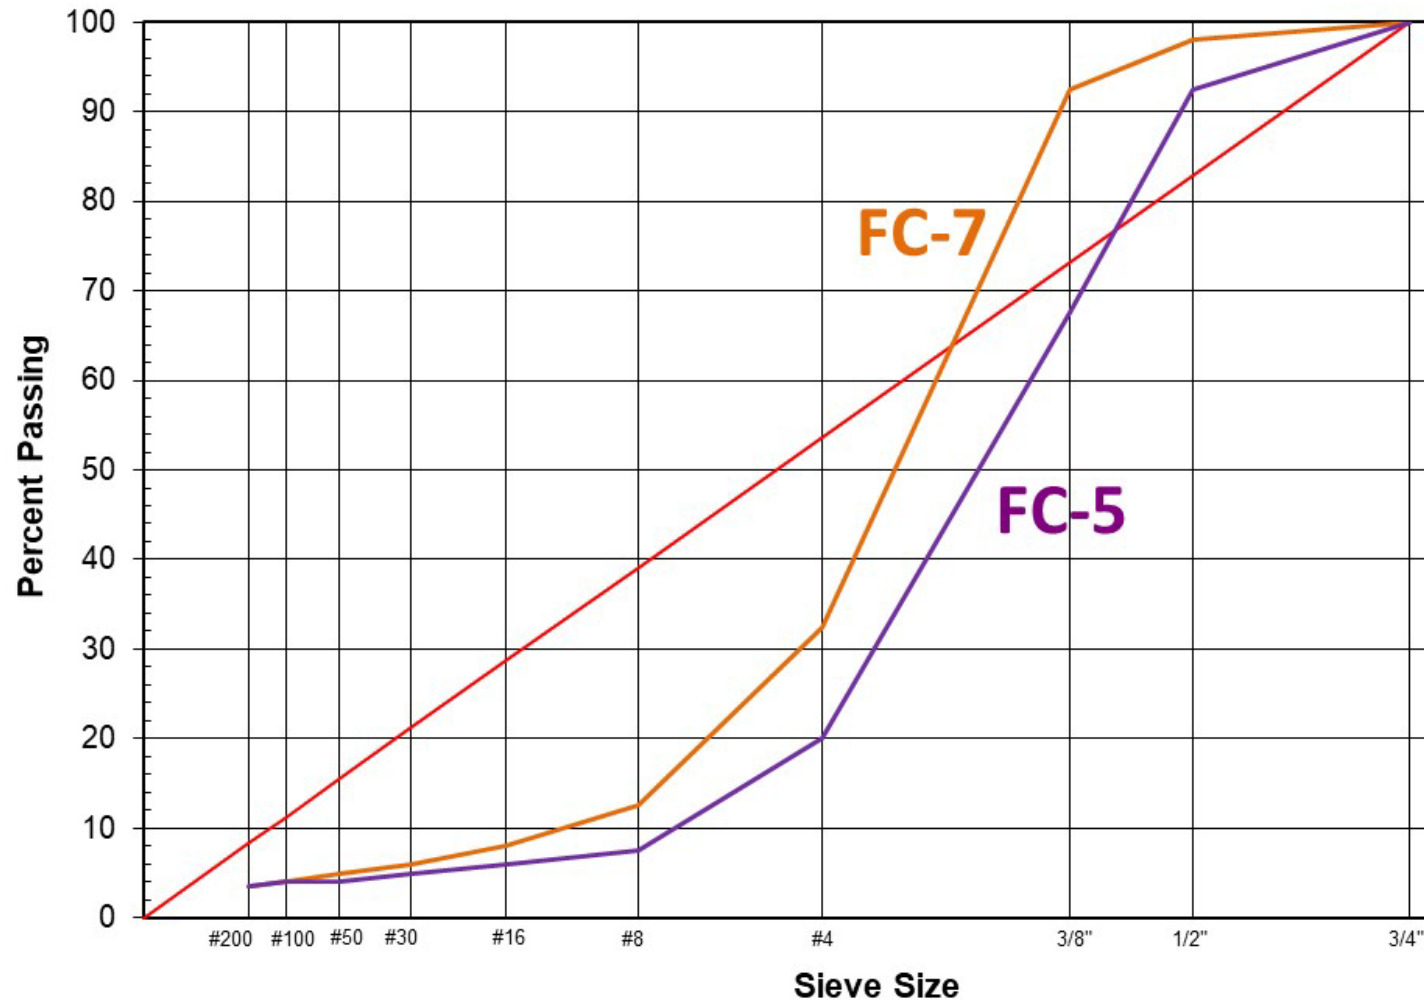

An adjustment has been made to the 1/2 inch gradation band to address the #89 / S1B stone supply concerns.

Table 337-2									
FC-5 Gradation Design Range									
3/4 inch	1/2 inch	3/8 inch	No. 4	No. 8	No. 16	No. 30	No. 50	No. 100	No. 200
100	85-100	60-75	15-25	5-10	--	--	--	--	2-5
FC-7 Gradation Design Range									
3/4 inch	1/2 inch	3/8 inch	No. 4	No. 8	No. 16	No. 30	No. 50	No. 100	No. 200
100	96-100	85-100	25-40	10-15	--	--	--	--	2-5





FC-5

FC-7



ACAF 2025 FLORIDA ASPHALT EXPO & CONFERENCE NEXT MILE * NEXT LEVEL

July 2026 - Section 337

- CPF equation changed slightly:

Pay Factor	% of Composite Pay Factor	
	FC-5	FC-7
3/8" sieve	20	10
No. 4 sieve	30	30
No. 8 sieve	10	15
AC content	40	45



**Thank you.
Comments/Questions?**

Greg Sholar
Asphalt Materials Engineer
gregory.sholar@dot.state.fl.us
Office: 352.955.2920
Cell: 352.317.6633

