



**HALSTEAD**

A PROUD MEMBER OF THE HMTX FAMILY

**Vinyl Flooring**

# Good, Better, Best

Transitioning  
to a 22mil



New Colors  
and Pricing




Now  
Available



# Product Information - Dryback / Glue Down

**VERGE** **PRO**

- Lifetime residential warranty
- 20 year commercial warranty
- Core = flexible vinyl
- 20 Mil wear layer
- 2.5mm overall thickness
- Enhanced Ceramic Bead finish
- Water resistant
- Easy glue down installation

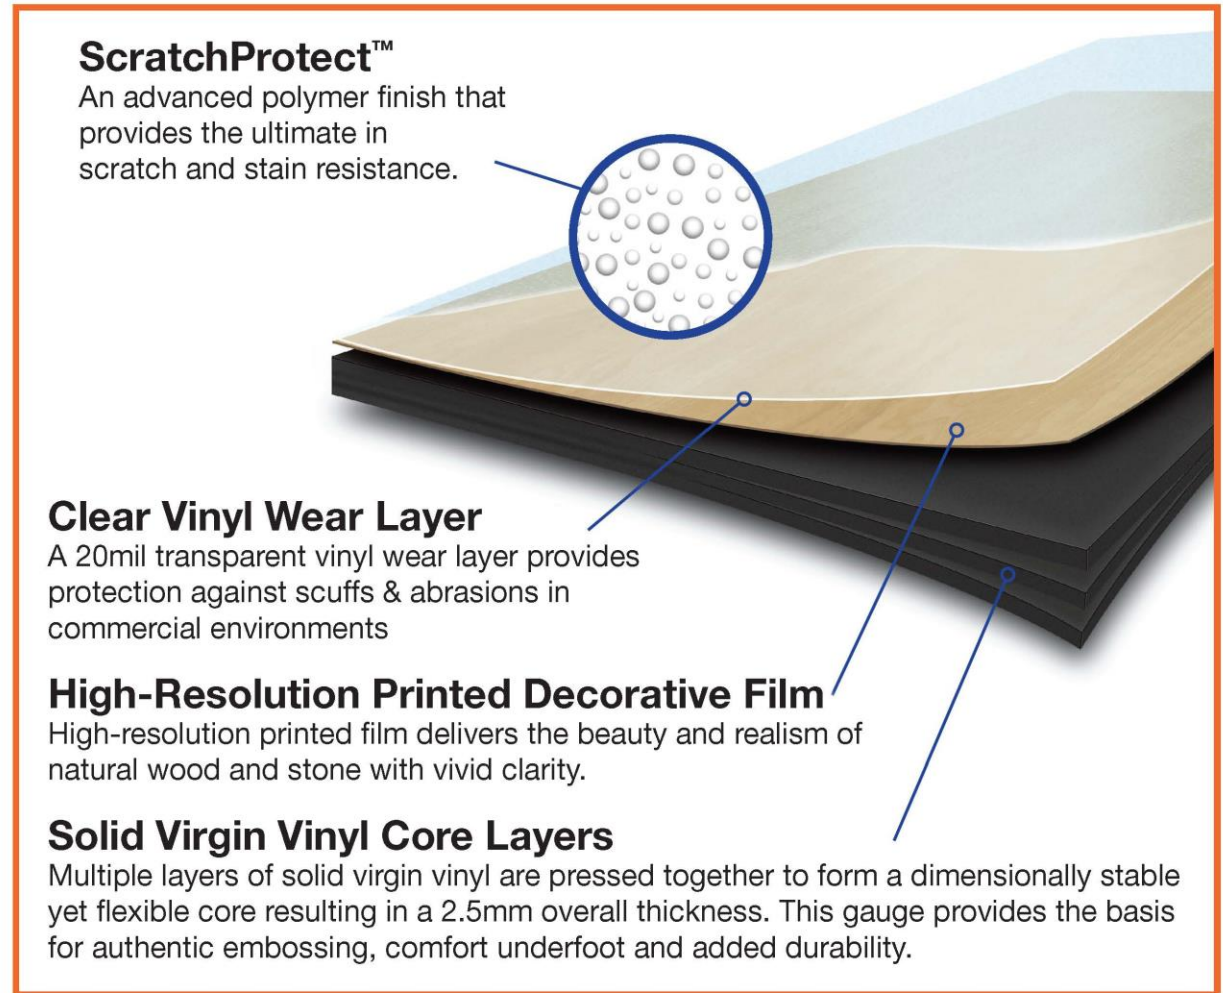

# Product Information – SPC Click / Floating

**HOME**  
DECORATORS  
COLLECTION®

- Lifetime residential
- 10 year commercial warranty
- Core = Solid Polymer Core
- 12 Mil wear layer
- 4.0mm overall thickness
- Enhanced Ceramic Bead finish
- Waterproof
- Easy drop-lock Installation
- Attached underlayment pad

Enhanced Ceramic Bead Surface


Clear Vinyl  
Wear Layer

High-Resolution  
Printed  
Decorative Film

Solid Polymer Core

Easy Installation with  
drop-and-lock end joints

Sound Mitigating Underlayment

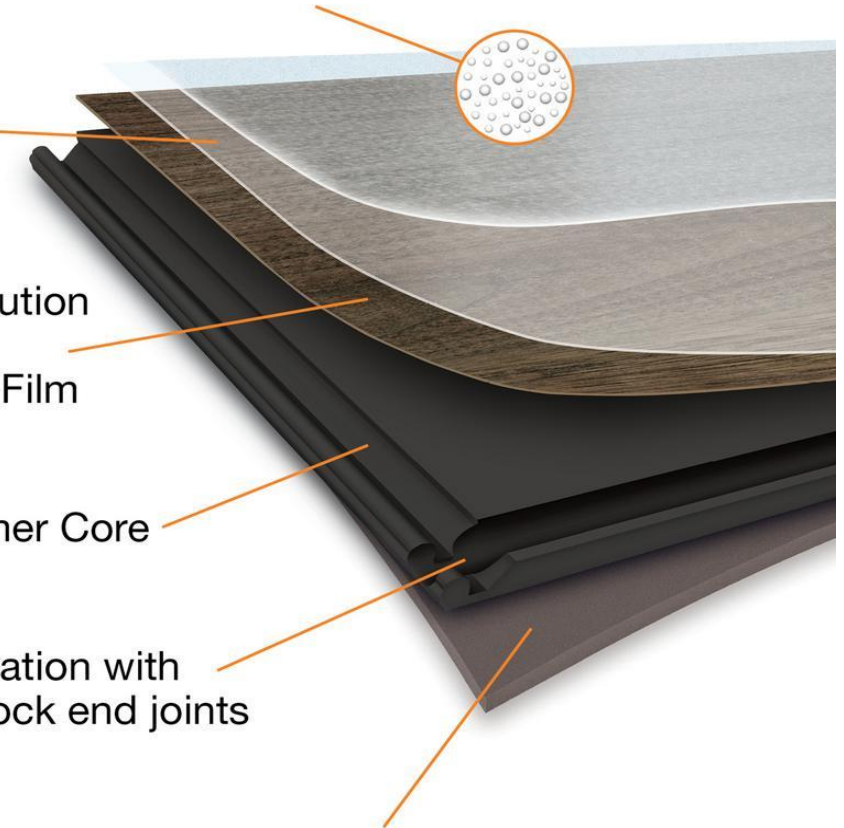

# Product Information - Click / Floating



- Lifetime residential / 20 year commercial warranty
- Core = Rigid Core (IsoCore)
- 6.5mm+ overall thickness
- 22+ Mil wear layer
- ScratchProtect™- The ultimate in scratch and stain resistance
- Waterproof
- Easy drop-lock installation
- Attached underlayment pad
- UltraFresh™- Inhibits the growth of odor and stain causing mold and mildew



# Super SKU's Planks



Chevron



48"




60"



72"

# Cera-grout and new tile SKU's

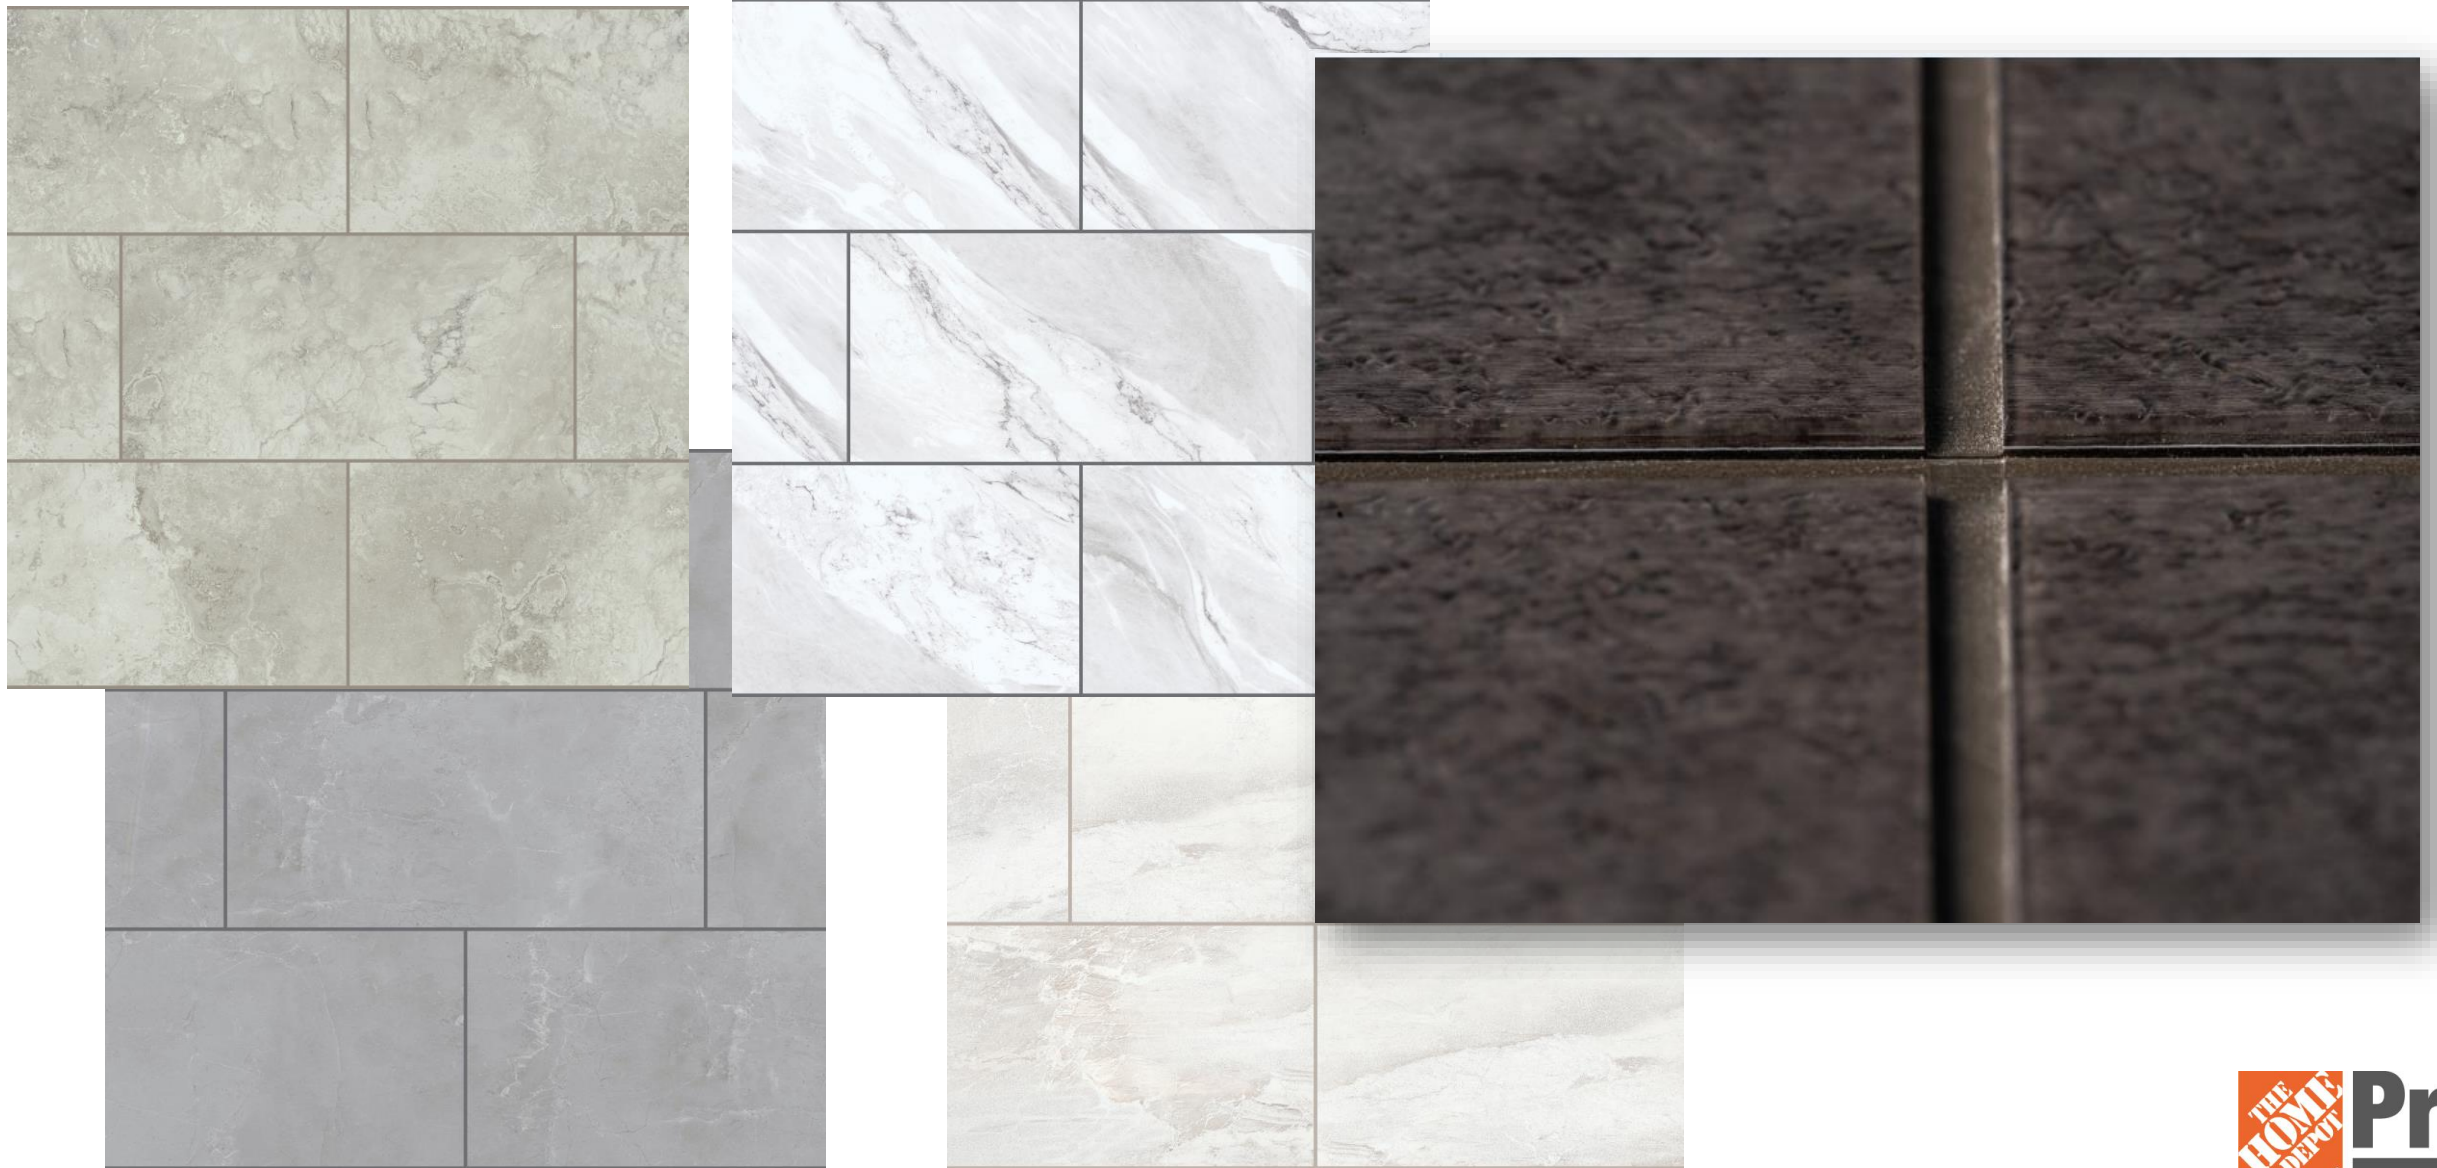


# Sales Tools

	BETTER	BEST	GOOD	BETTER	BEST	BEST
	Verge	Verge Pro	Trafficmaster	Home Decorators Collection	LifeProof	LifeProof Commercial
Product Type	Flexible Vinyl	Flexible Vinyl	Flexible Vinyl	SPC Rigid	WPC Rigid Core	WPC Rigid Core
Product Installation	Glue-Down	Glue-Down	OripStrip™	Click	Click	Click
Product Thickness	2.0mm Overall Thickness	2.5mm Overall Thickness	3.8mm Overall Thickness	4.8mm Overall Thickness	6.5mm+ Overall Thickness	6.5mm+ Overall Thickness
Wear Layer	8 MIL Wear Layer	22 MIL Wear Layer	4 MIL Wear Layer	6 MIL Wear Layer	6 MIL or 12 MIL Wear Layer	22 MIL Wear Layer
Residential Warranty	Lifetime	Lifetime	25 Year	Lifetime	Lifetime	Lifetime
Commercial Warranty	10 Year Light	15 Year Full	N/A	5 Year Light	6MIL=5yr Light 12MIL=10yr Light	15 Year Full
Pre-Attached Underlayment	No	No	No	Yes (polyethylene)	Yes (polyethylene)	Yes (polyethylene)
Waterproof/Water Resistant	Water Resistant	Waterproof	Water Resistant	Waterproof	Waterproof	Waterproof
Temperature Ranges Post Install	65-85 F	65-85 F	65-85 F	50-100 F	50-100 F	50-100 F
Acclimation Required?	Yes	Yes	Yes	No Acclimation Required	No Acclimation Required	No Acclimation Required
Total SKUS Available	7+ SKUS	6+				
Antimicrobial	No					
Embossing	Textured	Te				
Kid & Pet Friendly	Better					
Added Finish for Scratches/Scuffs	Ceramic Bead	Scratch				



**TRANSPARENCY**  
BEYOND INGREDIENTS

Taking care of our people and doing the right thing - two values at the core of how our stores think and operate. We know that the best projects are the ones built sustainably, and those projects can't happen without exceptional customer service and know-how from associates in our stores. Our commitment to responsible business practices for our people, products and operations is built - and will continue to grow - on this foundation.

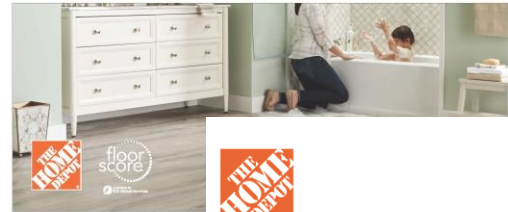

DI  
The Home Depot's product testing program is reinstated. Volatile Organic Compounds (VOCs), formaldehyde, phthalates in LifeProof® are the same standards used for the important to the fact that LifeProof® is FloorScore® certified. By selecting LifeProof®, you have made the choice for safe businesses and homes? Come join us and discover all of

**PHYSICAL PROPERTIES (FLOATING MULTILAYER MODULAR FLOORING) - 8.0MM GAUGE**

Collection	Plank - XL	Plank - XXL
Size	8.75" x 4' (220mm x 1510mm)	8.75" x 2' (220mm x 1028.8mm)
Overall Gauge	8.0mm (0.315")	8.0mm (0.315")
Wear Layer	12mil (0.3mm)	21.7mil (0.85mm)
Top Layer	2.0mm (0.079") LVT	2.0mm (0.079") LVT
Core	5.0mm (0.197") Rigid Core	5.0mm (0.197") Rigid Core
Pad	1.0mm (0.039") HDPE	1.0mm (0.039") HDPE
Use	Light Commercial & Residential	Light Commercial & Residential
Profile	Micro-Bevel	Bevel
Finish	Enhanced Ceramic Bead	Enhanced Ceramic Bead
Ultra-Fresh	Included in Finish and Pad	Included in Finish and Pad
Embossing(s)	In-Register	In-Register, Natural Timber
Pieces/Carroll	6 pieces	6 pieces
Coverage/Carroll	21.45 Sq Ft (1.99 Sq M.)	25.98 Sq Ft (2.41 Sq M.)
Limited Warranty	Light Commercial - 10 Years Residential - Lifetime	Light Commercial - 15 Years Residential - Lifetime

**STANDARDS - SAFETY & PERFORMANCE**

Standard	Description	Requirements	Results
ASTM E848	Critical Radiant Flux (Radiant Panel)	Class I: ≥ 0.45 W/m <sup>2</sup>	Passes Requirements <sup>1</sup>
ASTM E862	Smoke Density	Flaming & Non-Flaming: ≤ 450	Passes Requirements <sup>2</sup>
ASTM E2047	Coefficient of Friction (Slip Resistance)	Not Applicable (No Official Requirements)	≥ 0.8 (Dry)
ASTM F970	Static Load	Plank - XL: No Requirements Plank - XXL: 60,000 <sup>3</sup> 250psi	Plank - XL: Not Applicable Plank - XXL: Passes Requirements
BSM Test	Static Load Limit	Test to Limit (±0.005")	≥ 200psi
ASTM F2199	Dimensional Stability	Plank - XL: ΔL ≤ 25% / Ineal R Plank - XXL: ΔL ≤ 25% / Ineal R	Plank - XL: Surpasses Requirements Plank - XXL: Surpasses Requirements
ASTM F925	Chemical Resistance	No more than "Slight Change"	Surpasses Requirements
ASTM F1514	Resistance to Heat	Average ΔE = 8.0	Surpasses Requirements
ASTM F1915	Resistance to Light	Average ΔE = 8.0	Surpasses Requirements
ASTM D21	Antifungal Activity	Not Applicable (Official Requirements)	Top (D1), Bottom: 0-1%
ASTM F963	Heavy Metals	Refer to Standard	Passes Requirements
ASTM D7823	Phthalates	Refer to CPSCA <sup>4</sup>	Passes Requirements
ASTM F410	Wear Layer Thickness	Plank - XL: No Requirements Plank - XXL: ≥ 0.007" (0.2mm)	Plank - XL: Not Applicable Plank - XXL: Passes Requirements

**STANDARDS - SOUND**

Assembly	ASTM E90	ASTM E482	ASTM E2179	Results (Remarks)
6" Concrete Slab	STC 50	IC 50	ΔIIC 24	All tested assemblies pass (BC) <sup>5</sup> requirements of STC ≥ 50 and IIC ≥ 50 for multi-story dwellings
6" Concrete Slab	STC 55	IC 55	Not Applicable	
6" Concrete Slab with Drop-Ceiling	STC 62	IC 70	Not Applicable	

Notes:  
1) ASTM E848 - Critical Radiant Flux (Radiant Panel): Passes Requirements for Class I per International Building Code (IBC) 2018 & NFPA 101 Life Safety Code  
2) ASTM E862 - Smoke Density: ΔIIC is the limit established by many state, county, and/or local building codes and/or the codes. See it and use it as a guide for residential flooring products.  
3) ASTM F970 - Static Load: Block samples representative for testing products may vary from production to production.  
4) CPSCA - Consumer Product Safety Authority. Top Surface (LVT Top Layer) and Bottom Surface (PVC) tested 0-1% (No Growth to +10% Growth)  
5) IBC - International Building Code  
Ultra-Fresh is a registered trademark of Thomson Research Associates, Inc.

## LifeProof Information and Installation Video

<https://www.youtube.com/watch?v=SsuXGPehys8>

## Plank Replacement Video

<https://www.youtube.com/watch?v=PhNqgHCJFOs>

## Track Orders/ Check Inventory

<https://tracking.halsteadintl.com/>

